

LED CCT Tuneable Recessed Down light

INSTALLATION INSTRUCTION


IMPORTANT SAFEGUARDS

when using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. To reduce the risk of electrical shock, turn off power supply before installation or servicing.
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
3. Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
4. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.






RECESSED DOWNLIGHT HOUSING COMPATIBILITY



5. The recessed luminaire is intended for mounting only in a covered ceiling where only the led side of the luminaire will be exposed to dry, damp or wet locations.

Model	Input Voltage	Frequency	Power	CCT	Rated Current (max)	A	B
A-DLR-12W-120V-345K-WH	AC 120V	50/60Hz	12W	27K/30K/35K/40K/50K	0.11	7.32"(186mm)	2.13"(54mm)

NEW CONSTRUCTION INSTALLATION

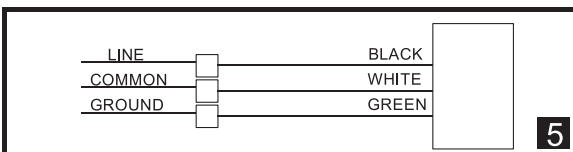

STEP 1:

Make sure the POWER IS TURNED OFF at the source to the recessed housing in which you are installing the product.

STEP 2(Fig 1):

If a new hole is needed, use a hole cutter to take hole according to the size in the table. A template is provided to assist with laying out the hole location.

STEP 3(Fig 5):

Connect wire to the power source (black to hot, white to neutral, green to ground). Close the J-box securely.

STEP 4 Fig 2 :

Adjust the color temperature to desired one, by sliding the other selector switch. Make sure the switch is never in between positions.

STEP 5(Fig 3):

Squeeze the spring clips so they are in an upright position and insert lamp into housing.

STEP 6(Fig 4):

Once fixture is inside the housing, release the spring clips and continue pushing fixture until securely fixed and flush with ceiling.

STEP 7:

Restore power at the source and the installation is complete.

STEP 8:

Once the fixture is mounted on the wall, caulk the space between the wall and the Shell.