

CCT Selectable Adjustable Wall Pack SPECIFICATION

ANTEC
LIGHTING

Add: 18541 E Gale Ave, City of Industry, CA 91748


Tel: (626) 986 4050 Email: kathym@antecighting.com

Web: www.antecighting.com




■ Features

- 1、CCT Selectable - 3000K/4000K/5000K.
- 2、120-125lm/w LUMILED.
- 3、1-10V Dimming.
- 4、4KV Surge protection.
- 5、IP65 for wet locations.
- 6、50,000 hour life.
- 7、5 Years warranty.
- 8、UL and DLC Listed.



28W/40W



60W/80W

■ Dimension


SKU	L	W	H
AN-TWP-28W-345K	"6.49"" (165mm)"	"3.86"" (98mm)"	"8.07"" (205MM)"
AN-TWP-40W-345K			
AN-TWP-60W-345K	"8.50"" (216mm)"	"4.41"" (112mm)"	"11.06"" (281mm)"
AN-TWP-80W-345K			

■ Specification


SKU	Power	Input Voltage	Input Current	CCT	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Life span	Lamp shell
AN-TWP-28W-345K	28W	AC120-277	0.257A	3000K-4000K-5000K	65° X 95°	120lm/W	>80	-40F°~-+104F° -40°C~-+40°C	-40F°~-+140F° -40°C~-+60°C	≥50000H	Brown
AN-TWP-40W-345K	40W		0.367A			120lm/W					
AN-TWP-60W-345K	60W		0.550A			125lm/W					
AN-TWP-80W-345K	80W		0.734A			120lm/W					

■ Insturction Manual for CCT Selection


1. Use screwdriver to remove the screws and fixing knobs at both sides, then take down the heat sink.

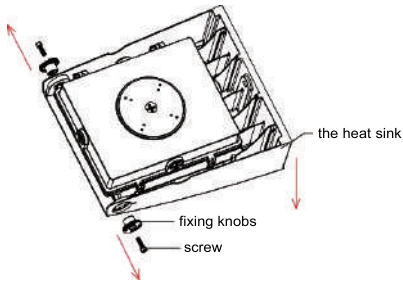


2. Remove screws with screwdriver, detach the cover from bottom box.

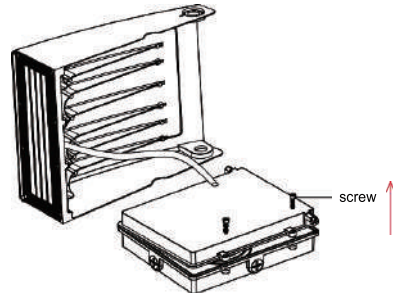


3. Unscrew and open bottom box, set up CCT through inside DIP Switch, default switch gear is 4000K, dial downward for positioning 3000K, dial upward for 5000K, dial to middle for 4000K. Users can dial to positions for the CCT needed.

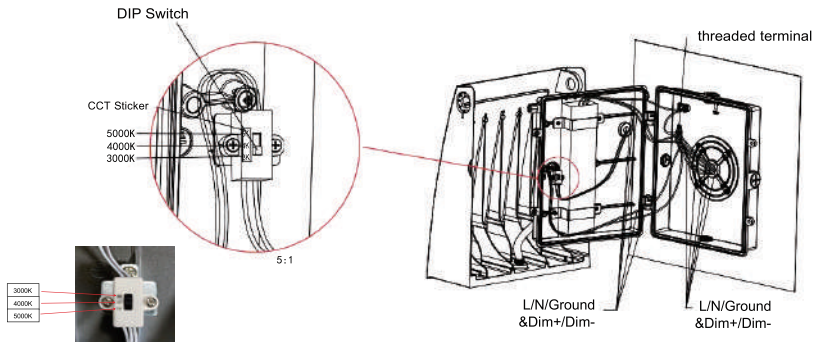

4. Screw the cover back to bottom box with screwdriver after selecting CCT.

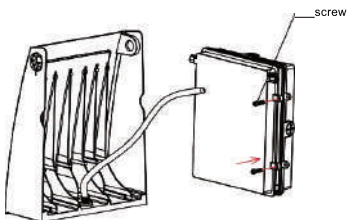

5. Attach the heat sink to bottom box, tighten the screws and fixing knobs with screwdriver, CCT adjustment done.

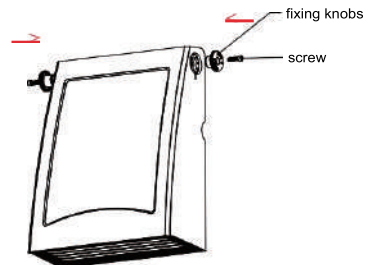


Safety Information


- 1 · Using the standard working voltage: AC120~277V, 50/60Hz, do not exceed.
- 2 · Be sure the power supply is turned off before installation.
- 3 · Switch off power of the mains supply or the connection lead respectively before doing any works.
- 4 · Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
- 5 · Directly fix bolts on the installation stem through the hole on the mounting bracket.
- 6 · Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
- 7 · Please read the specification carefully before installation.
- 8 · The complete installation must be handled by an electrical expert

■ Installation Manual


1. Use a screwdriver to remove the screw and the fixing knob and remove the heat sink assembly.

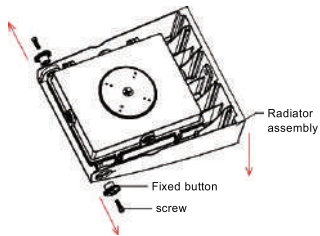


2. Use a screwdriver to remove the screw and remove the outer casing.

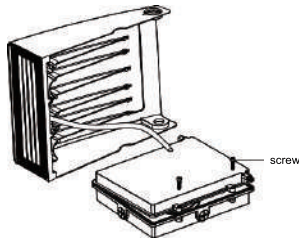


3. Unscrew the cover of the entry hole on the lamp base and remove the cover.

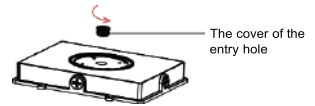


4. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.




5. Tear off the adhesive paper of the waterproof pad and stick the waterproof pad to the lamp base.




6. Put the input line and dimming line (if not, please ignore) from the embedded junction box through the lamp base and then screw the lamp base to the embedded junction box.

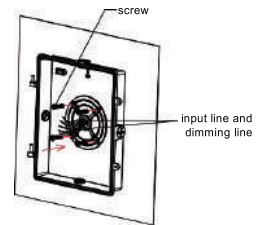


7. Install the upper half of the fixture on the lamp base, then use the threaded terminal to connect L/N/ ground wire, dim+/dim- (if not, please ignore) separately, and then plug the threaded terminals into the embedded junction box, adjust the switch to the required color temperature.

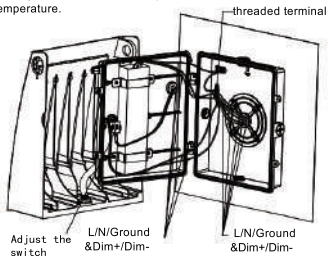

8. Screw the case with a screwdriver.

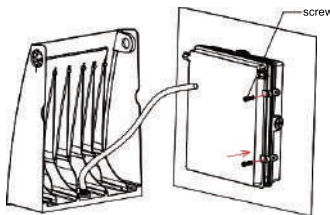

9. Install the heat sink assembly and tighten the screws and fixing knob with a screwdriver to complete the installation.

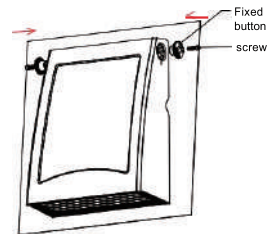

Packing /weight

SKU	Inner box (L*W*H)	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs)	G.W/Ctn (lbs)	Remarks
AN-TWP-28W-345K	265*215*160mm 10.4*8.5*6.3inch	455*285*355mm 17.9*11.2*14inch	4	14.68	16.28	0.15M cable
AN-TWP-40W-345K				15.18	16.68	
AN-TWP-60W-345K	335*265*170mm 13.2*10.4*6.7inch	555*355*375mm 21.9*14*14.8inch		19.84	23	
AN-TWP-80W-345K				20.72	23.92	