
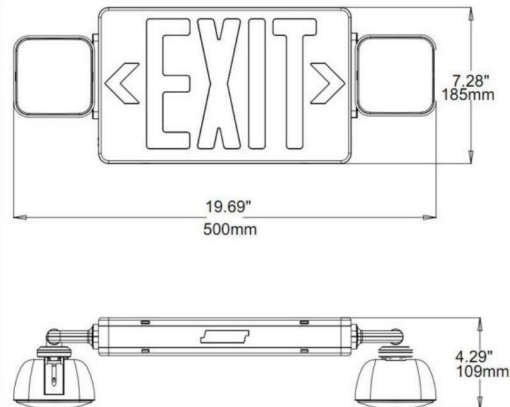


IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS Warnings and Cautions

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.

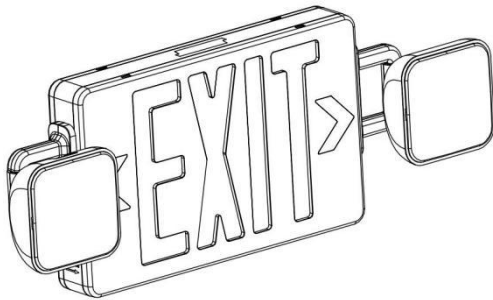


Part No.	Input voltage	CCT	Power	Rated Current
A-EX01-R	120/277V 50/60Hz	Red	1.2W	100mA
A-EX01-G	120/277V 50/60Hz	Green	1.2W	100mA
A-EX01-BLK-R	120/277V 50/60Hz	Red	1.2W	100mA
A-EX01-BLK-G	120/277V 50/60Hz	Green	1.2W	100mA

Package Contents

Part	Description	Quantity
1	Emergency Lighting	1
2	Hardware Kit	1

SAVE THESE INSTRUCTIONS

Use Flexible Conduit Only




Mounting Instructions



NOTE: First turn off electricity.

Wall mounting (max. Mounting height: 13.8ft)


1. Open the EXIT housing and diffuser with a screwdriver.

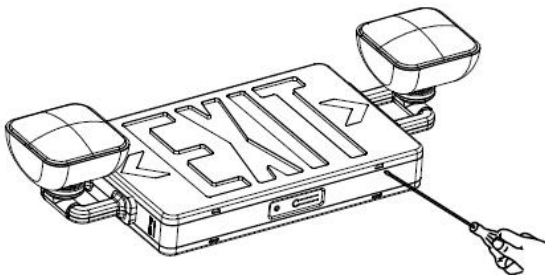


2. Knockout in back of mounting plate and push wires through the hole.

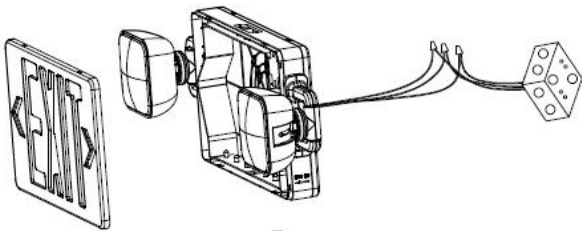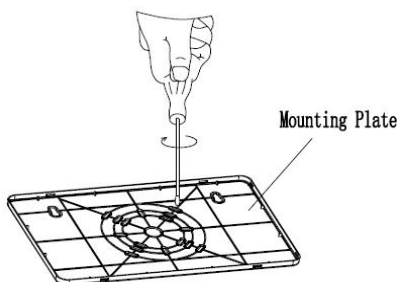

3. Make the proper supply lead connections. If using 120VAC, connect the black and white leads to the building utility. If using 277VAC, connect the orange and white leads to the building utility. Cap off unused wire. If the unit is self-powered, be sure to snap battery connector together.

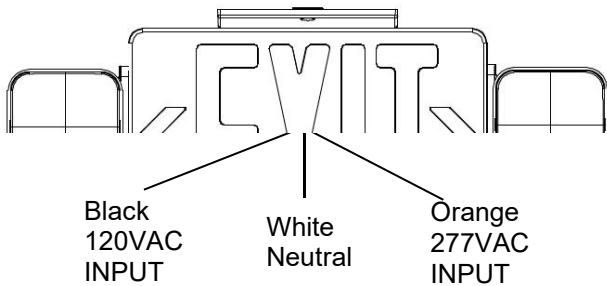

4. Connect the battery to PCB.

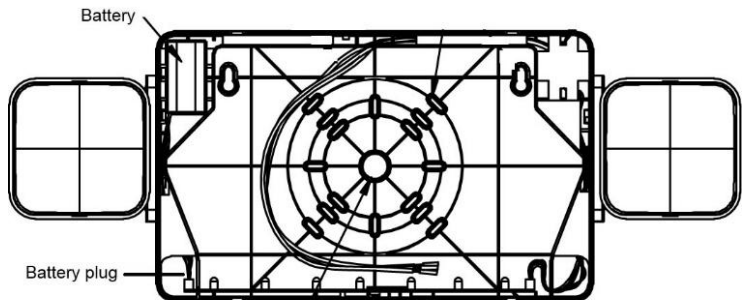


5. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

6. Restore power and press test button. Battery powered LED will come on, AC light will turn off.

Ceiling mounting

1. Open the EXIT housing and knockout on the top of fixture.

2. Knockout in top of mounting plate and push wires through the hole.

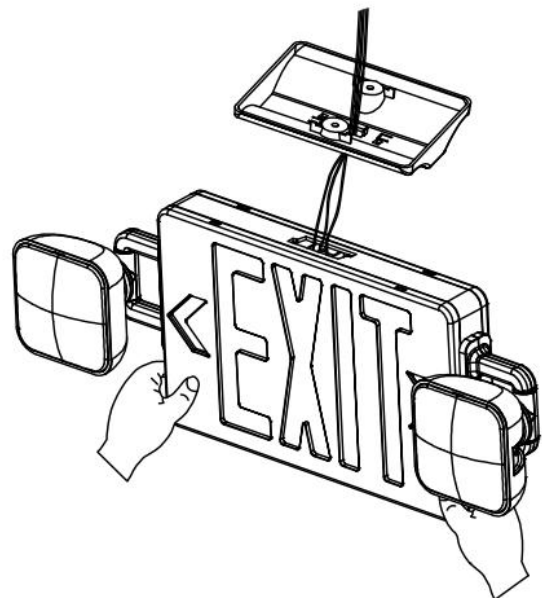

3. Reference step 3 - 6 in wall mounting above for ceiling mounting.