

LED Ceiling Light INSTALLATION INSTRUCTION


IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed

Before Installation:

Warning:


1. Cut off the power supply before installing to avoid electric shocking. Failure to cut off the power supply before installation may result in serious injury or death.
2. Should be installed by qualified electricians.
3. A loose wire increases the risk of fire; tighten all connections securely.

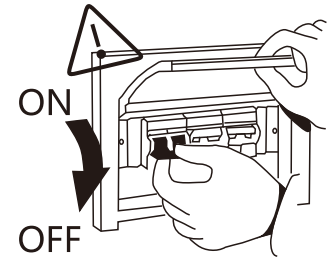

PRODUCE OPTIONS:

Model	Voltage	Frequency	Power	CCT	Dimension
A-SDL12IN-24W-5CCT WH	AC 100-277V	50-60Hz	24W	27K/30K/35K/40K/45K	Ø12"x0.7"
A-SDL16IN-32W-5CCT WH	AC 100-277V	50-60Hz	32W	27K/30K/35K/40K/45K	Ø16"x0.7"
A-SDL20IN-45W-5CCT WH	AC 100-277V	50-60Hz	45W	27K/30K/35K/40K/45K	Ø20"x0.8"


Package Contains:



1 PC Lamp Fixture



3 * wire nuts



2* type1 mounting screws



3* plastic anchors




3* type2 mounting screws

Installation Instruction

please read carefully and save instructions,as you may need them at a later date

Step1:Fix the installation hanging board with screws .(Pic.1)



Step2: Before installation, set your favorite colour temperature.(Pic.2)

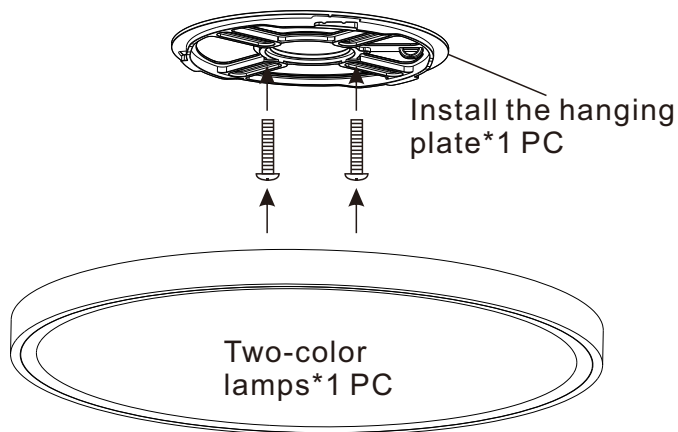

Pic.1

Color temperature selection:

- 3000K: Warm
- 3700K: Soft Warm
- 4200K: Neutral light
- 5000K: Daylight
- 6000K: Cool White


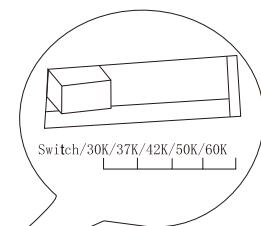


Pic.2

Step3: Installing Mounting Screws:


A). If install to a outlet boxes: use the type1 mounting screws (or the screws from the outlet boxes) to assemble the Fixture Pan: Screw the screws to the outlet box, rotate the screws about two rolls, do not tighten them.(Pic.3 A)

B). If install to a wood ceiling, use type2 mounting screws. If install to a concrete ceiling, please use type2 mounting screws + the plastic anchors: Marking/locating the hole position on the ceiling by borrowing the hole position on the Fixture Pan, then punch suitable size holes at the hole marks, then rotate the type2 mounting screws to the wood ceiling (or the plastic anchors) about three rolls, do not tighten them.(Pic.3 B)

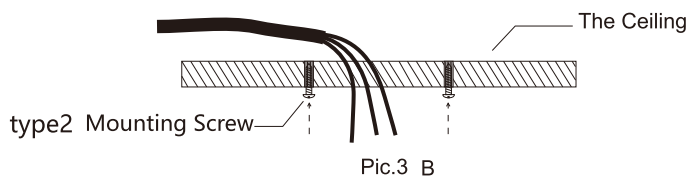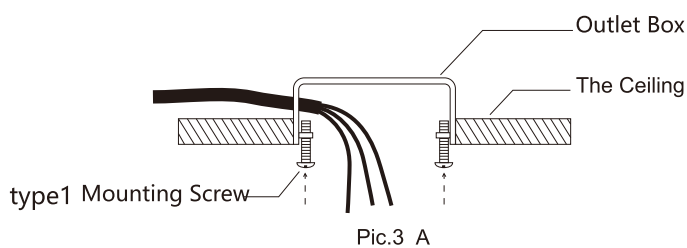



Step 4: Connect wire by wire nuts.

- Connect the Black Live Wire on the fixture pan to the live wire (typically black) on the outlet box or the ceiling.
- Connect the White Naught Wire on the fixture pan to the Naught wire (typically white) on the outlet box or the ceiling.
- Connect the Green Ground Wire on the fixture pan to the Ground Wire (typically Green) on the outlet box or the ceiling.(Pic.4)

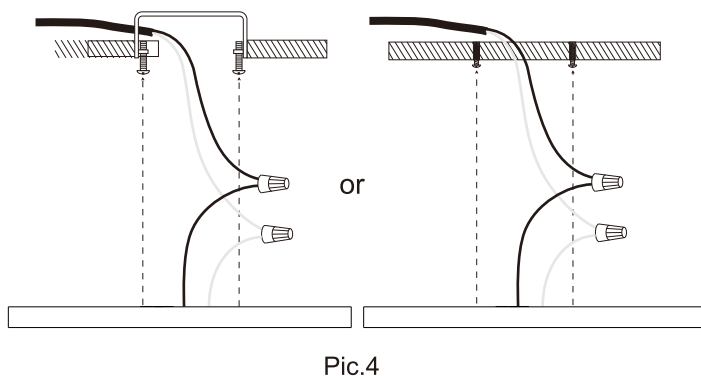

Step 5: Installing Fixture Pan:

Align the mounting screws with the larger holes of the keyhole slots (Pic.5.1), make the mounting screws pass through the larger holes. Then rotate the fixture pan, make the mounting screws in the smaller holes of the keyhole slots.(Pic.5.2). Tighten the mounting screws.

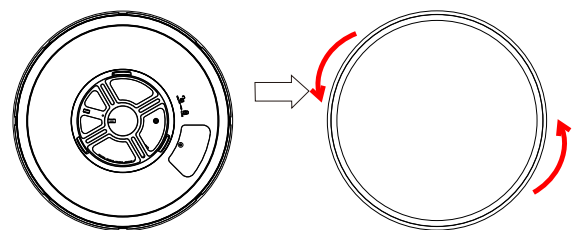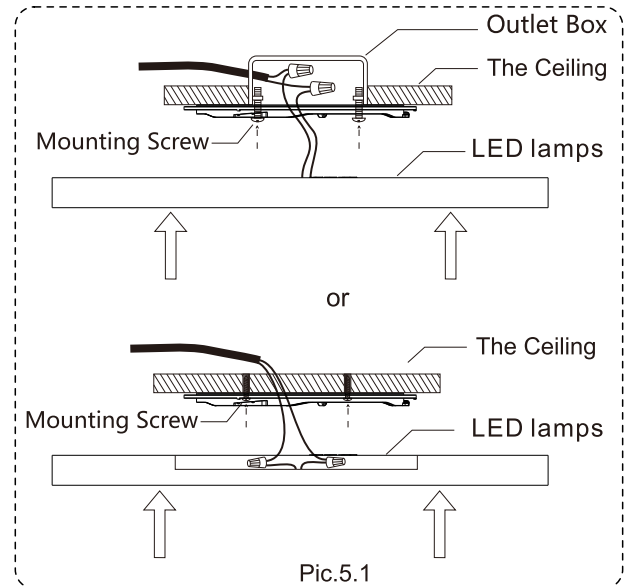

Step 6: Hide the wires and joints, rotate the lamp to the tightest position, and the installation is complete.(Pic.6)

