
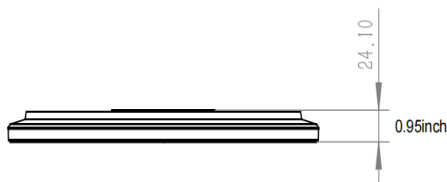


IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. RISK OF ELECTRIC SHOCK. Turn off power before inspection, installation or removal of fixture.
2. Under no circumstances can the lamp be installed on the surface of ordinary flammable materials and it is normal for the lamp to slightly heat up during use.
3. Clean with a slightly wet and soft cloth. Please do not use any cleaning or abrasive solutions.
4. DO NOT install in unstable, loose or easily breakable surfaces.
5. Can be used with SCR dimmer
6. The light source should only be replaced by the manufacturer service technician commissioned by the manufacturer or a person with comparable qualifications.



Activate the light fixture. Turn off the light fixture. Activate night light mode.

Flip Wall Switch to Change Mode.

Model	Input Voltage	Frequency	Power	CCT	Rated Current(max)	Lumen Output
A-SDL12IN-28W-5CCT-WH	120V AC	50/60HZ	28W	27K/30K/35K/40K/50K	0.23A	2100LM
A-SDL12IN-28W-5CCT-WH-NL	120V AC	50/60HZ	28W	27K/30K/35K/40K/50K	0.23A	2100LM

NEW CONSTRUCTION INSTALLATION




FIG. 1




FIG. 2

STEP 1:

Turn off the Power (FIG.2)

STEP 2:

Turn the back plate counterclockwise (FIG.3)




FIG. 3




FIG. 4

STEP 3:

Use two M4*20 screws to attach backplanes to the junction box. Do not lock tightly (FIG.4)

STEP 4:

Adjust the switch to desired color temperature (FIG.6)




FIG. 5




FIG. 6

STEP 5:

Connect the black and white cable to power wires through the backplane with wiring nuts. (FIG.7)




FIG. 7




FIG. 8

STEP 6:

Turn the fixture clockwise, lock the screws (FIG.8)