

EMERGENCY LIGHTING




INSTALLATION INSTRUCTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS Warnings and Cautions

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.

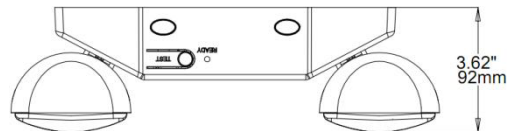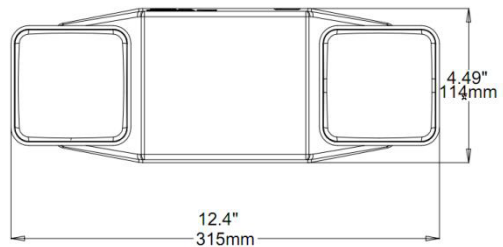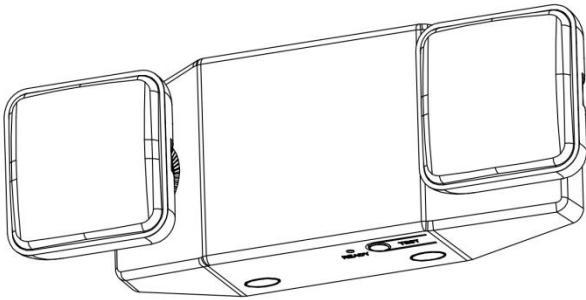


Part No.	Input voltage	CCT	Power	Rated Current
A-EM03-W	120/277V 50/60Hz	6500K	0.9W	110mA

Package Contents

Part	Description	Quantity
1	Emergency Lighting	1
2	Hardware Kit	1

SAVE THESE INSTRUCTIONS

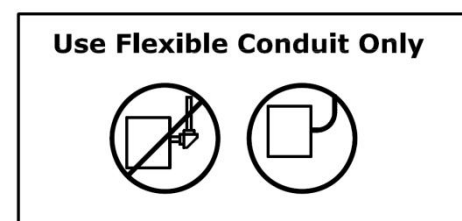


Mounting Instructions

NOTE: First turn off electricity.



Wall mounting(Max. mounting height is 19.60ft.)

1.Remove mounting plate from fixture.

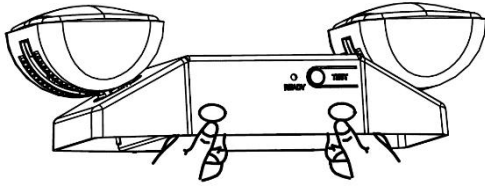

2.Knockout in back of mounting plate and push wires through the hole.


3.Securely attach mounting plate to J-box.

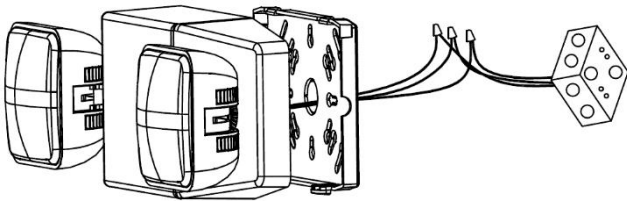

4.ELECTRICAL CONNECTIONS

Make the proper supply wire connections.

Connect the black and white wires to the building utility.

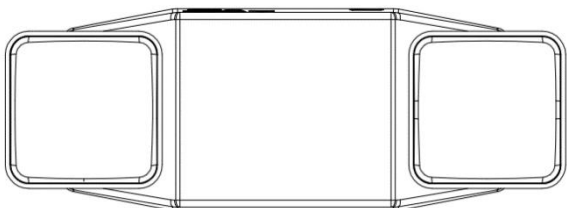


Black
120VAC
INPUT

White
Neutral

Orange
277VAC
INPUT

5. Connect the battery to connector on the PCBA.

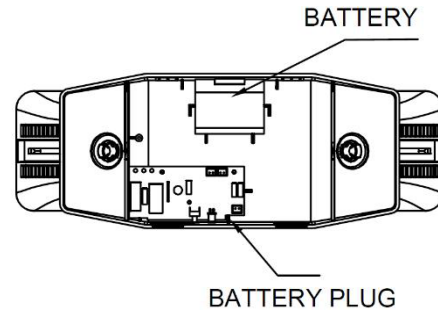


6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Restore power and press test button. Battery powered LED will come on, AC light will turn off.

Ceiling Mounting

1. Open top cover and knockout on the top of fixture.

2. Secure the mounting plate to tube with nut.

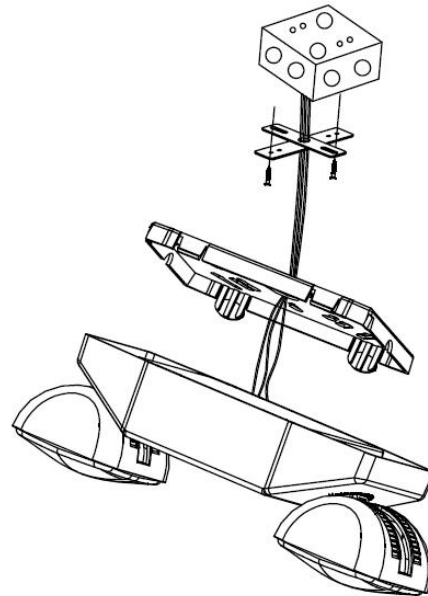

3. Reference step 4 - 7 in wall mounting above for ceiling mounting.