

Read this instruction carefully before installation. Keep it for further reference. Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation. This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
AN-VT2FT-NV20W-YK	20W	AC100-277V	2600lm	130lm/W	3500K 4000K 5000K 6500K	120°	>80	>0.9	5 Years
AN-VT4FT-NV32W-YK	32W		4100lm						
AN-VT4FT-NV40W-YK	40W		5200lm						

◆ Remark: "Y" represents the CCT, could be 4 or 5 and indicate 4000K or 5000K.


WARNING:

- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation. Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
DO NOT exert force on the surface of the fixture.


Installation Manual

A.Surface-mounted Installation


1. Drill holes in the wall, install mounting clips to wall with screws and plastic expansion tubes.




2. Push fixture into mounting clips for fixing.

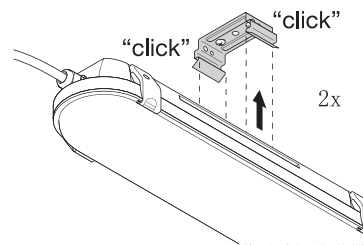

3. Installed view as bellow figure.

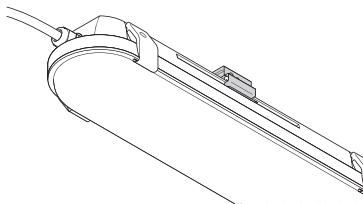

4. Turn on lights after connecting to line voltage.

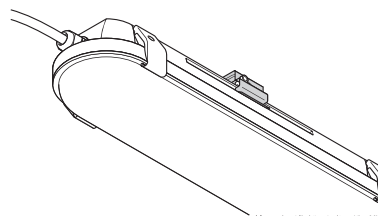


B. Suspended Installation


1. Drill hole in the wall, install the fixing base with a screw and a plastic expansion tube.




2. Hang the mounting clip to the hook of suspension cable.



3. Push the fixture into mounting clip for fixing.

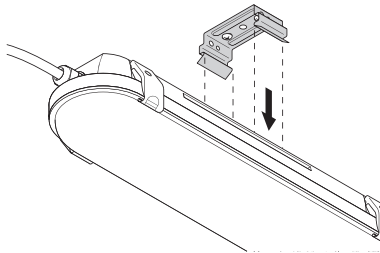

4. Turn on the lights after installation.

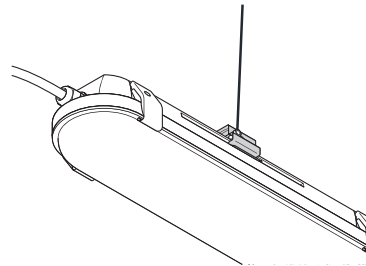

The Installation must be carried out by a qualified electrician.