

LED Security Light With Camera

A-SCM24W-NV-5700K


ORIGINALITY DESIGN SMART - AND BEAUTIFUL

.....

CAMERA



QUICK GUIDE

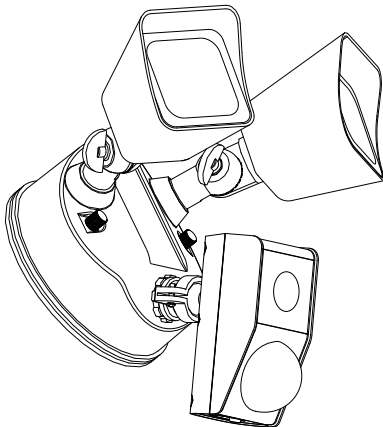


What's in the box

Consult the checklist below for all components.



Camera



Wire nuts




Screws 8#-32*25




Screws 10#-24*5



User Manual

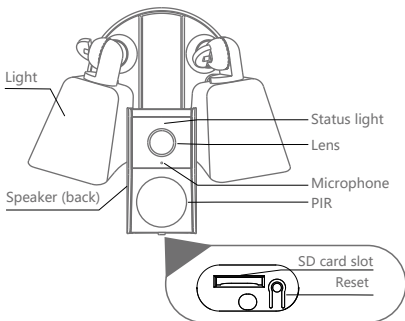

Power	AC 100~240V
Status light	• Blinking red light: waiting for network connection • Solid blue light on: camera is working correctly • Solid red light on: the network is malfunctional
Microphone	Capture sounds for your video
SD card slot	Support local SD Card storage (Max.128G)
Reset	Press and hold for 5 seconds to reset the device (if you have modified settings, they will return to factory defaults)
Light	Turn the light on/off manually or automatically. And you can adjust brightness by App.

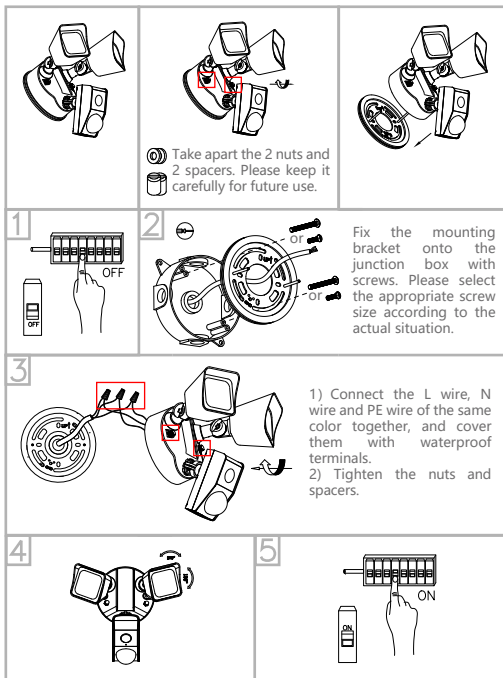

Download

CloudEdge is available for both iOS and Android operation system. Search the name "CloudEdge" in App Store or Google Play, or scan the QR-Code to download the App.

Support



Add device

Log in the CloudEdge, select "Add Device", and add the smart camera to the App according to the screen tips(Make the smart camera close to the router when configuring).




NOTE:

If you need to re-select the WiFi network, please press and hold the "RESET" button for 5 seconds, the device will restart, and the indicator will be flashing red.

Registration process

Step 1 Open the App, click "Sign up now" to register.


If you already have an account, click "Log In" to log in.

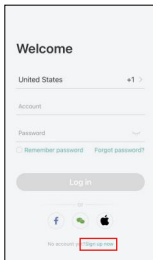

The image shows a mobile app's 'Welcome' screen. At the top, it says 'Welcome'. Below that is a dropdown menu for 'United States' with a '+1' and a chevron icon. There are input fields for 'Account' and 'Password'. Below the password field are links for 'Remember password' and 'Forgot password?'. A large grey button labeled 'Log in' is in the center. Below it, separated by 'or', are three social media icons: Facebook, WhatsApp, and Apple. At the bottom, there is a link 'No account? Sign up now' which is highlighted with a red rectangle.

Step 2 Input a legal Email address and check the privacy agreement.

Then enter the nickname and password.


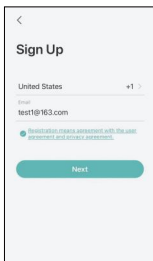


The image shows the 'Sign Up' screen. At the top is a back arrow. Below it is the title 'Sign Up'. There is a dropdown for 'United States' with a '+1' and a chevron icon. An 'Email' input field contains 'test1@163.com'. Below the email field is a checkbox with a green dot and the text 'I've read and agree with the user agreement and privacy agreement.' Below this is a large teal button labeled 'Next'.




The image shows the 'Sign Up' screen. At the top is a back arrow. Below it is the title 'Sign Up'. There is an 'Account' input field containing 'Test1@163.com'. Below that is a 'Nickname' input field containing 'AA'. Below the nickname field is a 'Password' input field with a strength indicator icon. Below the password field is a note: 'Password: 8-16 digits, including two types of numbers, upper or lower case letters and characters at least'. At the bottom is a large teal button labeled 'Done'.


Step 3 Click "Add Device" or "+", and then select the corresponding camera icon to add.

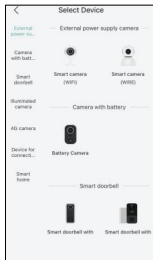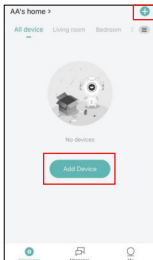

Step 4 Power on the device and click "Next" on App.

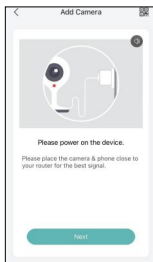

Step 5 Reset the camera and click "Next" on App.

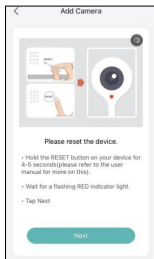


Step 6 Select the WiFi network and input the password, and then click "Next".





Note: 1) Camera only supports 2.4GHz WiFi network.

2) The number of bits in the ssid and passwords of the router should not exceed 24 digits.

Step 7 View the operation instructions of scanning, and then click "Next". Scan the QR code in your phone with the camera and click "Next", when the camera comes out "dong dong dong". And you can complete the configuration about 30s.



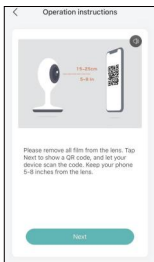


Step 8 When connecting, you should make sure your router, mobile and camera are as close as possible.

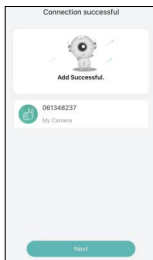
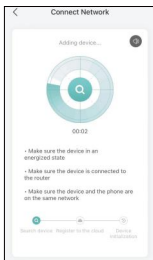


Step 9 Follow the on-screen instructions.

You can click "✎" to DIY the camera's name.

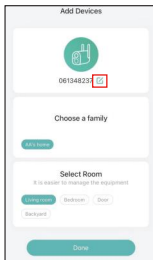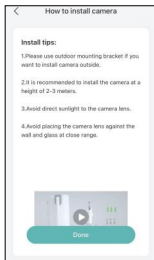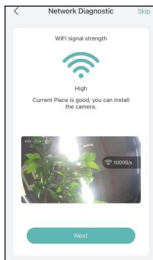

Step 10 In live view interface, click "🔗", and then you can set up the camera common functions.

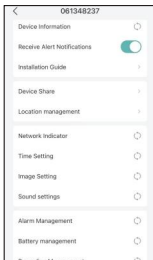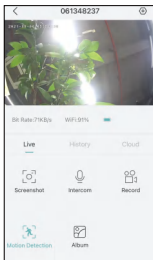

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the Internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Lighting Control

You can turn the light on or off with time setting or PIR, and you can adjust brightness by App.

Motion detection

Support smart motion detection. The camera will detect movements, and then send you push notifications and app alerts. And you can set up motion detection area according to environment.

Noise detection

Support noise detection, it can detect noises caused by accidents.

Two-way Audio

You can see and hear the visitor in your App from the camera.

PIR

When the camera detects someone stopping by, it sends an alarm message to your cell phone.

Record


Using SD card or activating the Cloud-Storage Service to keep recording for every moment.

Day & Night

Powerful night vision without any interruption, even in complete darkness.



Daytime



Night